



## Hardware


# BRITON PANIC HARDWARE OPTIONS

TECHNICAL SPECIFICATIONS

T. 01524 727000 E. sales@strongdor.com  
[www.strongdor.com](http://www.strongdor.com)




Assessed to BS ISO 9001:2015  
 Cert. No.1542

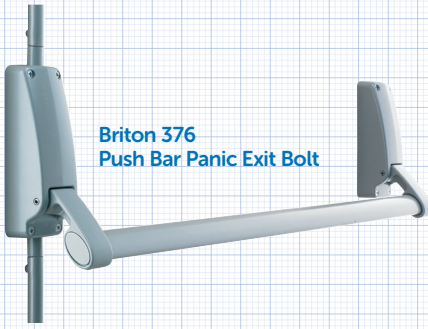

**Briton 376  
Push Bar Panic Exit Bolt**

The Briton 376 Panic and Emergency Exit Hardware Series has been designed to provide immediate escape at all times. It includes a two point locking system for extra security with an anti-thrust device that prevents unauthorised retraction of the latch bolt. Suitable for use on single and double door applications it can be fitted to both left and right handed doors. The 376 Series also has adjustable top and bottom shoots and is supplied with an easy clean socket.

- CE Marked (AAA011)**
- Certifire approved (CF 5506)**
- Fully Certified to EN1125 Classification 376B1322AA**
- EN 1634 fire testing for 4 hour steel fire doors**

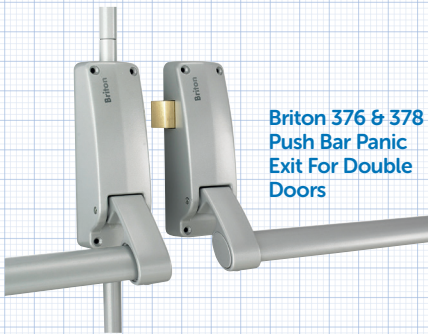

**Briton 376 & 378  
Push Bar Panic  
Exit For Double  
Doors**

Designed for use on double door applications and to suit rebated double doors. The three point locking system is fitted with an anti thrust device to prevent unauthorised latch bolt retraction. Site reversible for left and right hand 376/378 Series is suitable for door leaves up to 2500mm high x 1300mm wide. With adjustable top and bottom shoots, it is also supplied with easy clean socket and latch keep for double door applications


- CE Marked (AAA011)**
- Fully certified to EN1125 classification 376B1322AA**
- EN 1634 fire testing for 4 hour steel fire doors**



**Briton 378  
Push Bar Panic Exit Latch**

Briton 378 rim panic latch is suitable for use on single doors and the first opening leaf of double door-set. It can be supplied in left or right hand, but can also be reversed on site. Suitable for doors up to 1300mm wide. There is a double door strike available for double rebated door applications. The panic latch is also available with manual dogging (hold open) and can be used with a rim cylinder fitted to the outside of the door.


- CE Marked**
- fully certified to EN 1125 Classification 376B1322AA**
- EN 1634 fire testing for 4 hour steel fire doors**

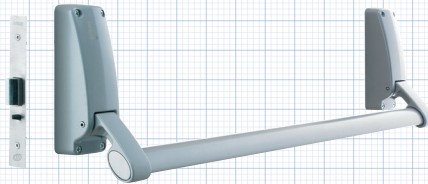

**Briton 379.N - Push Bar Panic Exit With  
Mortice Nightlatch**

The Briton 379N can be used on single doors and the first opening leaf of a double door. It consists of a single point locking system that is site reversible for left or right hand. Suitable for doors up to 1300mm wide, it is supplied with dual profile cylinder mortice nightlatch (cylinder not supplied). Anti thrust device prevents unauthorised latch bolt retraction.

- CE Marked (AAA011)**
- Fully certified to EN 1125 classification 376B1322AA**
- EN 1634 fire testing for 4 hour steel fire doors**

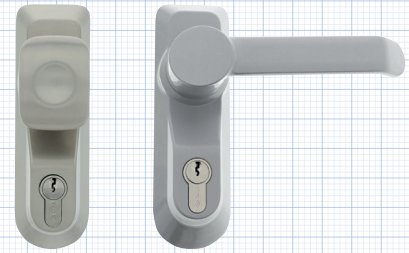

**Briton Outside Access Device**

Outside access device which can be used with any of the Briton panic and emergency exit devices. They provide a simple means of accessing the door from the outside. Designed to suite with all Briton CE compliant exit devices. Powder coated for additional durability.

**Knob and lever handle versions available**

**Briton 389.N - Push Pad  
Emergency Exit Mortice  
Nightlatch**

Designed for use on single doors and the first opening leaf and a double door. The 389N has a single point locking mechanism that is site reversible for left or right hand. It comes supplied with dual profile cylinder mortice nightlatch (cylinder not supplied). Anti thrust device prevents unauthorised latch bolt retraction

- CE Marked (ABB020)**
- Fully certified to EN 179 Classification to EN 179 - 376B1342BA**



**Briton 1438 - Push Pad  
Emergency Exit Latch**

This push pad is designed for use on a single and double door applications. With a single point latching systems it can be used for single doors and in combination with Briton 372 on double doors. Site reversible for left and right hand.

- CE Marked (ABB020)**
- Fully certified to EN 1125 Classification 376B13426A**



## Hardware

# BRITON PANIC HARDWARE OPTIONS

TECHNICAL SPECIFICATIONS



Assessed to BS ISO 9001:2015  
Cert. No.1542

★★★★ Trustpilot

T. 01524 727000 E. sales@strongdor.com  
[www.strongdor.com](http://www.strongdor.com)